


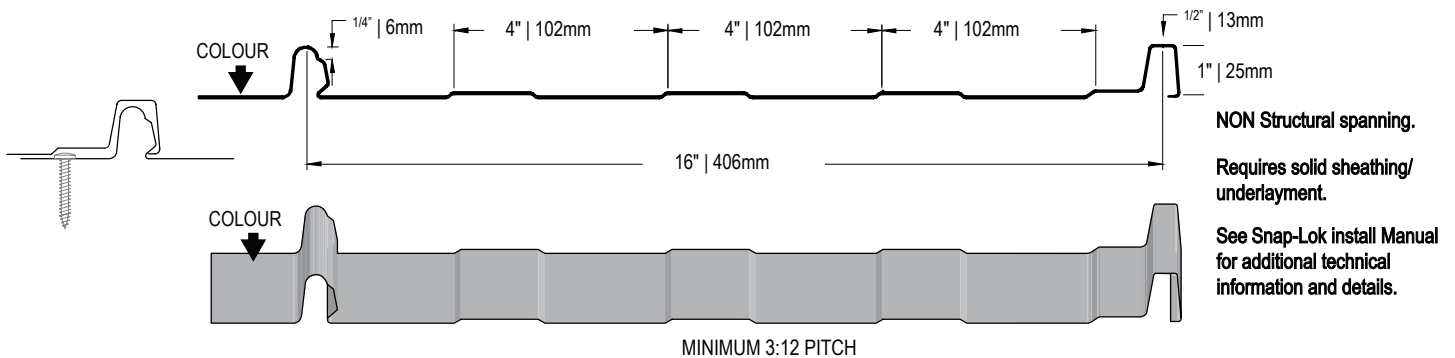

The steel used to manufacture Snap-Lok 12" sheets, meets or exceeds the following specifications and reference standards:

ASTM A792/A792M, 55% Aluminum-Zinc Alloy-Coated (Galvalume) Steel Sheet with coating designation AZM150 [AZ50] for Painted Galvalume and Plain Galvalume sheets.

ASTM A653/A653M, Zinc-Coated (Galvanized) Steel Sheet with coating designation Z275 [G90] for Plain Galvanized sheets.

CSSBI 20M-17, Standard for Sheet Steel Cladding for Architectural, Industrial and Commercial Building Applications.

CSSBI S8-2018, Quality and Performance Specification for Prefinished Sheet Steel Used for Building Products.

CSA-S136-16, North American Specification for the Design of Cold-Formed Steel Structural Members.

		Gauge(s)					Gauge(s)					Gauge(s)		
Classic/Comm	Colour Code	26	24		Classic/Comm	Colour Code	26	24		Classic/Comm	Colour Code	26	24	
Antique Linen	8696	•	•		Deep Water Green	8684				Metro Brown	8228	•	•	
Black	8262	•			Galvalume	2	•	•		Pacific Turquoise	8258			
Bone White	8273	•	•		Galvanized	1	•			Regent Grey	8730	•	•	
Bright Red	8386	•			Gold	8276	•	•		Royal Blue	8790	•		
Bright White	8783	•	•		Heron Blue	8330	•	•		Sapphire Blue	8261			
Buckskin	9202	•	•		Hickory Moss	9368				Slate Blue	8260	•	•	
Burgundy	8011				Int'l Orange	8234				Stone Grey	8305	•	•	
Cambridge White	8695	•			Iron Ore	8614	•	•		Tan	8315	•		
Charcoal	8306	•	•		Ivory	8802				Tile Red	8259	•		
Coffee	8326	•	•		Light Stone	9367	•			Whistler Green	8093	•		
Dark Brown	8229	•	•		Medium Green	8329				White White	8317	•	•	
Dark Red	8250	•			Melcher's Green	8307	•	•						

Textured	Colour Code	26	24		Textured	Colour Code	26	24		Exotic	Colour Code	26	24	
Chocolate Brown	6034	•			Jet Black	6039	•			Copper Penny	2005	•	•	
Chrome Green	6037	•			Oxide Red	6042	•			Dark Zinc	1430	•		
Graphite Grey	6035	•			Sepia Brown	6041	•			Rustic Red	1426	•		

Wood Grain	Colour Code	26	24		Wood Grain	Colour Code	26	24						
Frontier Espresso	4100				Frontier Cedar	4101				Silver Mist	8047	•		
										Corten	9942			

Product Description	Grade(s)	lbs./Lin. Ft.	Additional Information
26 Gauge Plain Galvanized	33/50	1.41	Please contact your nearest location for availability and minimum/maximum lengths. Extended lead time may be required. See Westman Steel Colour Chart for complete range. Contact for custom colour & specialty coating option.
26 Gauge Plain Galvalume	33/50	1.41	
26 Gauge Coloured	33/50	1.41	
24 Gauge Plain Galvalume	33	1.81	
24 Gauge Coloured	33	1.81	

Colour availability can vary by branch and may result in longer lead times.
Additional crating and freight charges may apply.